


CUSTOMER INFORMATION

Company: \_\_\_\_\_ Date : \_\_\_\_\_ FILE N°: \_\_\_\_\_  
 Name: \_\_\_\_\_ Email : \_\_\_\_\_ Phone: \_\_\_\_\_

CHAIN SPECIFICATIONS

Number of chains: \_\_\_\_\_  
 Length of chain:  Metres  Number of links  Feet

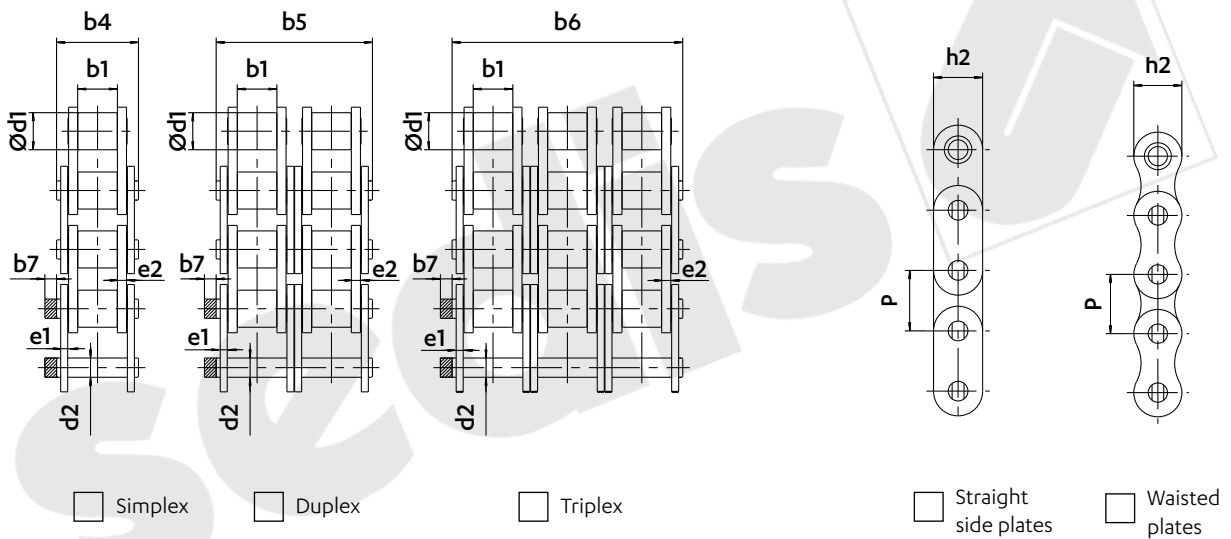

	P	b1	d1	d2	b4/b5/b6	h2	e1	e2
Chain reference	Pitch	Inner width	roller Ø	pin Ø	width over riveted pins	Plate height	Outer plate thickness	Inner plate thickness
	mm	min.	max.	max.	max.	max.	nom.	nom.
<b>Customer request</b>								
<b>SEDIS Proposal</b>	Minimum Breaking load (kN) =							
	Treatment =>							

Special conditions of the application (environment, temperature...):

CONNECTING LINKS

	N° 205	N° 206	N° 208	N° 209	N° 216	N° 217	N° 221
	External link to be riveted	Connecting link with spring clip	Cottered connecting link	Connecting link with self locking nuts	Single cranked cottered link	Single cranked link with self locking nuts	Double cranked link
Quantity	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>